Dino-Lite® Accessories



Dino-Lite® RK-06A Tabletop Stand

810-0208 - \$189.00

The Dino-Lite® RK-06A tabletop stand is designed for general purpose and built with quality. It is compatible with all Dino-Lite® handheld microscopes. With smooth focus adjustment and quick vertical movement and lateral movement, the RK-06A eases the task of focusing when using Dino-Lite® microscopes. Optional Pole RK-06-PL pole (810-0126) extends height an extra 11" (27cm).



810-0209 - \$99.00

The RK-10-PX is an optional XY positioning arm accessory for the RK-06A stand. The finely machined adjustment knobs on the RK-10-PX provide users with a 3cm x 3cm XY adjustment range. This type of positioning allows for precise movements when positioning the Dino-Lite® to a specific location or inspecting an area with magnification. The RK-06A stand is not included.



810-0091 - \$99.00

The Tabletop Stand (MS35B) is made of stainless steel and aluminum and features rigid design for unmatched stability and precision, 360° rotating slide assembly, & ball-and-socket microscope holster for an additional 45° lateral movement. Offers up to 8" working distance.

Optional Diffuser Set for Diamonds on the Dino-Lite® Edge Series Scopes

810-0207 - \$39.00

Diffuser set for diamond image capture with Dino-Lite® Edge Series Models. Includes 2 diffusers at different heights designed for viewing Diamonds. Easy to use, just Insert gently by placing the diffuser inside cap. Ensure diffuser is positioned straight to avoid blocking the LEDs. If the diffuser is too loose, place a 1mm or 1.5mm rubber spacer (included) over the recessed area around the edge of the diffuser. On the AM models, carefully remove by holding the clear plastic cap down with one hand, while gently twisting and pulling diffuser with the other hand.

Enclosed Light box

810-0121 - \$129.00

Photo box for premium image capture when lighting and color matters and is designed for image capture for numismatics and jewelry. Includes an 8" LED light bar (3750 LUX brightness & color temperature of 5500K).

Powered by an included 110V AC adapter, this photo box helps eliminate outside light pollution. Compatible with all Dino-Lite® Microscopes and the Dino-Lite® RK-06A (810-0208) Stand (allows you to place the Dino-Lite® outside of the box and view from the open slot). If you want a wider image or field of view use the optional RK-06-PL pole (810-0126).

Outer dimensions: 13"Wx9"D x9.25"H (310x230x 225mm) Some assembly required. One-year manufacturer's warranty. Made in China.

Wireless Connectivity



Dino-Lite® WF-20 Wireless Adapter 810-0235 - \$269.00


The WF-20 Connect allows AF models (wireless ready) to be used wirelessly in connection with an iOS (iPhone/iPad) or Android app on any tablet, smartphone, or even in the DinoCapture software for Windows computers.



Dino-Lite
DIGITAL MICROSCOPE CONNECT®)



FOR INDUSTRIAL USEMeasuring • Inspection • Quality Assurance

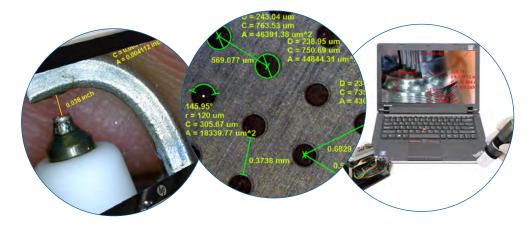

FOR JEWELRY USE


Jewelry Inspection • Examine Stones • Faster Appraisals





For more details or to view our complete line **www.gesswein.com**

201 Hancock Ave. Bridgeport, CT 06605, USA | order toll free 800.243.4466 phone 203.366.5400 | fax 203.366.3953 | web gesswein.com | email info@gesswein.com

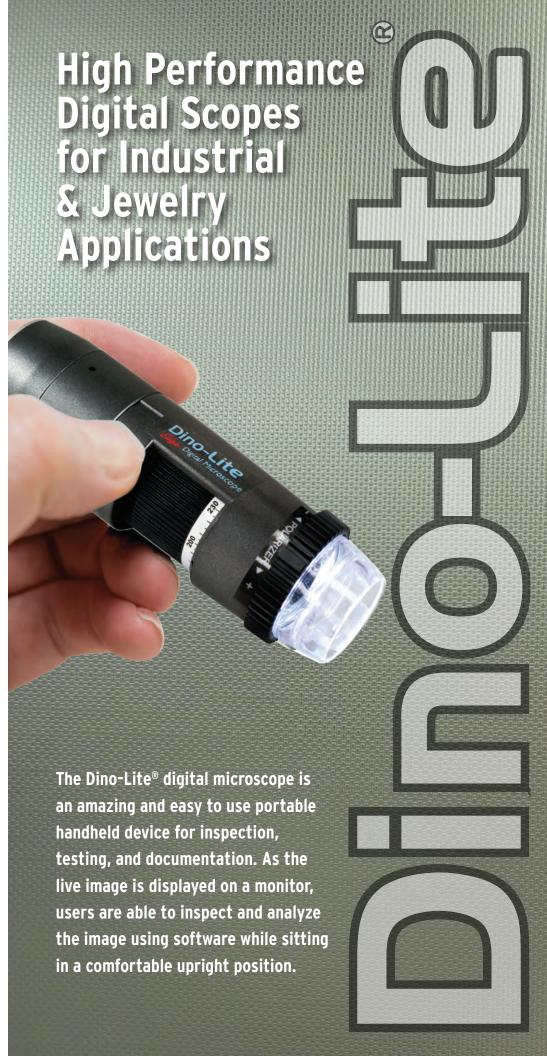

Dino-Lite®

High Performance Digital Scopes

Redefine the Microscope

All Scopes include:

- 8 Ultra-Brite LED Lights
- Microtouch 1/4" CMOS Sensor
- Magnification Lock
- Glass Lens
- 2 year Warranty









Dino-Lite® #	AM4111T	AF4115ZT	AF4115ZTW	AM4115ZTF	AF4915ZTL	AM4917MZT	AM73115MTF	AM7915MZT	AM7915MZTL	AM73915MZT
Series	Premier	Edge	Edge	Edge	Edge	Edge ^{PLUS}	Edge	Edge	Edge	Edge
Item #	810-0086	810-0111	810-0215	810-0202	810-0230	810-0210	810-0203	810-0205	810-0206	810-0204
Price:	\$329.00	\$629.00	\$689.00	\$699.00	\$929.00	\$1,199.00	\$1,129.00	\$1,269.00	\$1,299.00	\$1,369.00
Flexible LED Control:	No	Yes	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes
Measuring Software:	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Polarization:	No	Yes	Yes	Yes	Yes	Yes	No	Yes	Yes	Yes
Magnification:	10-50X, 220X	20-220X	10-50X	10-70X	10-140X	20-220X	10-70X	20-220X	10-140X	10-220X
Working Distance at Lowest Power:	6.6" (169mm)	2.37" (60mm)	2.6" (67mm)	18.9" (480mm)	9.2" (234mm)	2" (52mm)	18.9" (480mm)	2" (52mm)	9.2" (234mm)	2" (52mm)
Camera Megapixels:	1.3	1.3	1.3	1.3	1.3	1.3	5	5	5	5
Resolution (pixels):	1280 x 1024	1280 x 1024	1280 x 1024	1280 x 1024	1280 x 1024	1280 x 1024	2560 x 1920	2592 x 1944	2592 x 1944	2560 x 1920
Max Frame Rate (fps):	30	30	30	30	30	30	45	30	30	45
AMR*:	No	No	No	No	Yes	Yes	No	Yes	Yes	Yes
EDOF/EDR**:	No/No	No/No	No/No	No/No	Yes/Yes	Yes/No	No/No	Yes/Yes	Yes/Yes	Yes/Yes
Operating System:	Windows XP, Vista, 7, 8, 10 Mac OS 10.5+	Windows XP, Vista, 7, 8, 10 Mac OS 10.11.6+	Windows XP, Vista, 7, 8, 10 Mac OS 10.11.6+	Windows XP, Vista, 7, 8, 10 Mac OS 10.5+	Windows XP, Vista, 7, 8, 10 Mac OS 10.5+	Windows XP, Vista, 7, 8, 10 Mac OS 10.11.6+	Windows 7, 8, 10 Mac OS 10.9+	Windows XP, Vista, 7, 8, 10 Mac OS 10.9+	Windows XP, Vista, 7, 8, 10 Mac OS 10.9+	Windows 7, 8, 10 Mac OS 10.9+
Image Save Format:	BMP, JPG, PNG	BMP, JPG, PNG	BMP, JPG, PNG	BMP, JPG, PNG	BMP, JPG, PNG	BMP, JPG, PNG	BMP, JPG, PNG	BMP, JPG, PNG	BMP, JPG, PNG	BMP, JPG, PNG
Connectivity:	USB 2.0	USB 2.0/ Wireless Ready (requires adapter, 810-0235)	USB 2.0/ Wireless Ready (requires adapter, 810-0235)	USB 2.0	USB 2.0/ Wireless Ready (requires adapter, 810-0235)	USB 2.0	USB 3.0	USB 2.0	USB 2.0	USB 3.0
Dimensions (cm/in): (Length x Diameter)	10.5 x 3.2 4.13" x 1.26"	11.4 x 3.3 4.4" x 1.29"	11.4 x 3.3 4.4" x 1.29"	10.5 x 3.2 4.13" x 1.26"	11.4 x 3.3 4.4" x 1.29"	10.5 x 3.2 4.13" x 1.26"	11.9 x 3.3 4.69" x 1.29"	10.5 x 3.2 4.13" x 1.26"	10.5 x 3.2 4.13" x 1.26"	11.9 x 3.3 4.69" x 1.29"
Weight:	105g (3.7 oz.)	111g (3.9 oz.)	111g (3.9 oz.)	105g (3.7 oz.)	111g (3.9 oz.)	135g (4.76 oz.)	110g (3.88 oz.)	135g (4.76 oz.)	135g (4.76 oz.)	110g (3.88 oz.)
Body Material:	ABS Plastic	ABS Plastic	ABS Plastic	ABS Plastic	ABS Plastic	Aluminum Alloy	Aluminum Alloy	Aluminum Alloy	Aluminum Alloy	Aluminum Alloy
*AMR - Automatic Magnification Reading **FD0F/FDR - Extended Denth of Field/Enhanced Dynamic Range (Windows PC users only)										